

FIG.1 (PRIOR ART)

20.30

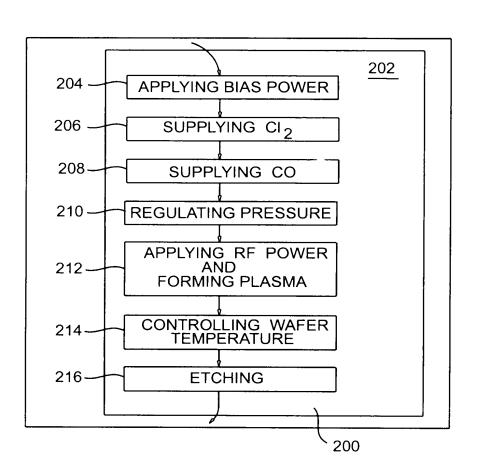
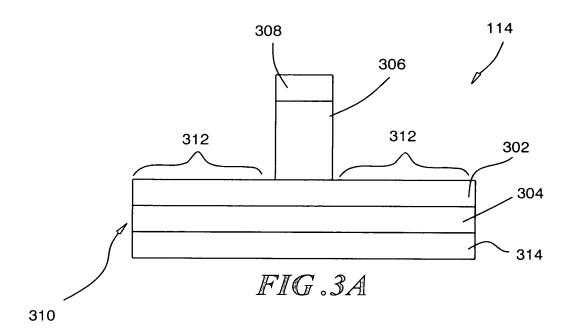


FIG. 2



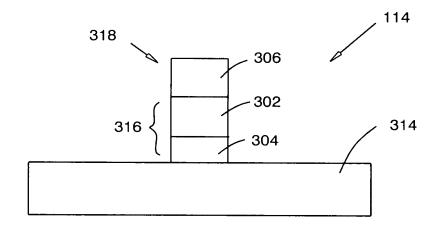


FIG.3B

400

PROCESS OF THE PRESENT INVENTION UTILIZING A DPS CHAMBER					404
PARAMETER	UNITS	RANGE		PREFERABLY	]
		MIN	MAX		402
Cl <sub>2</sub>	SCCM	20	300	40	
CO	SCCM	2	200	40	
TOTAL PRESSURE	mTORR	2	100	4	
ANTENNA POWER	WATTS	200	2500	1100	
PEDESTAL POWER	WATTS	5	100	20	]
PEDESTAL TEMPERATURE	DEGREES CELSIUS	100	500	350	

FIG.4